

Delo® Protection for Surface Mining Equipment



Hydraulic System

- Delo® TorqForce™ 10W (CAT TO-4)
- Delo TorqForce MP (CAT TO-4M)
- Clarity® Synthetic Hydraulic AW
- Rando® HDZ
- Ursa Hydraulic Oil 10W



Engine Crankcase

- Delo 400 XSP 5W-40
- Delo 400 XLE 15W-40
- Delo 400 SDE 15W-40
- Delo 600 ADF 15-40




Coolant System

Delo XLC Antifreeze/Coolant
 Delo ELC Antifreeze/Coolant
 Delo ELC Advanced Antifreeze/Coolant

Available as ISOCLEAN® Certified

The product recommendations provide general guidelines for use in mining equipment. All manufacturers have different coolant and lubricant requirements and recommendations. It will be important to contact a Chevron representative or refer to the Original Equipment Manufacturer manual to confirm the proper product is used for the application. Visit chevron-gsc.force.com/lubeteksupport for confirmation of specific OEM specifications.

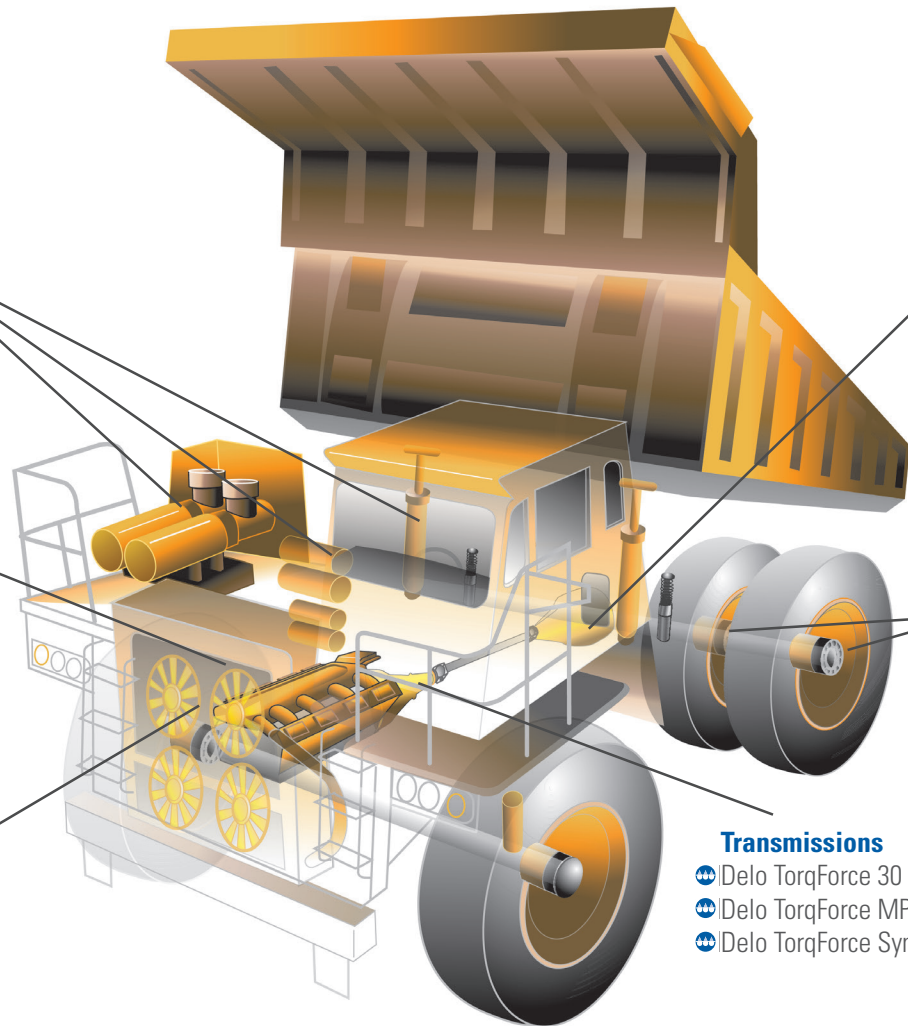

Differentials & Gear Drives

- Delo TorqForce 50 (CAT TO-4)
- Delo TorqForce FD 60 (CAT FD-1)



Bearings and Grease Points

Delo Grease ESI® HD EP
 Delo Grease ESI HD Moly 5% EP
 Delo Syn-Grease™ SXD 220 Moly 5% EP
 Delo Grease ESI HD Moly 3% EP



Transmissions

- Delo TorqForce 30 (CAT TO-4)
- Delo TorqForce MP (CAT TO-4M)
- Delo TorqForce Syn 5W-30 (CAT TO-4)



Delo®
 Let's go further.®

A Chevron company product

©2022 Chevron. All rights reserved. All trademarks are property of Chevron Intellectual Property LLC or their respective owners.

DLPTMNEQST_02-22