

Chevron Delo® Bumper-to-Bumper Protection for Marine Vessels

Compressor Oils

- Cetus® PAO
- Cetus HiPerSYN®
Cetus DE

Turbine Oils

- GST Oil
- Regal® R&O Series

Cooling System

Delo ELC Antifreeze/Coolant
Delo XLC Antifreeze/Coolant
Delo XLI Corrosion Inhibitor
Delo ELI Corrosion Inhibitor

Hydraulic Oils

- Clarity® Hydraulic Oils AW
- Clarity Synthetic Hydraulic Oils AW
- Clarity Synthetic EA Hydraulic Oils
- Rando® HDZ series
- Rando HD series

Environmentally Responsible Products

- Clarity Synthetic EA Hydraulic Oil
- Clarity Synthetic EA Gear Oil
- Clarity Synthetic EA Grease

Engine Lubricants


- Delo® 710 LS 20W-40 (Tier 4)
- Delo 400 XLE SB 15W-40 (API CK-4)
- Delo 100 Motor Oil 40

Gear Oils

- Meropa® Gear Oils
- Pinnacle® Marine Gear - Synthetic
- Delo 100 Motor Oil 40

Greases, Wire Rope & Open Gear Lubricants

- Multifak® EP 2
- Starplex® Syn HD 1.5
- Marfak® Bio EliteSyn HD 2

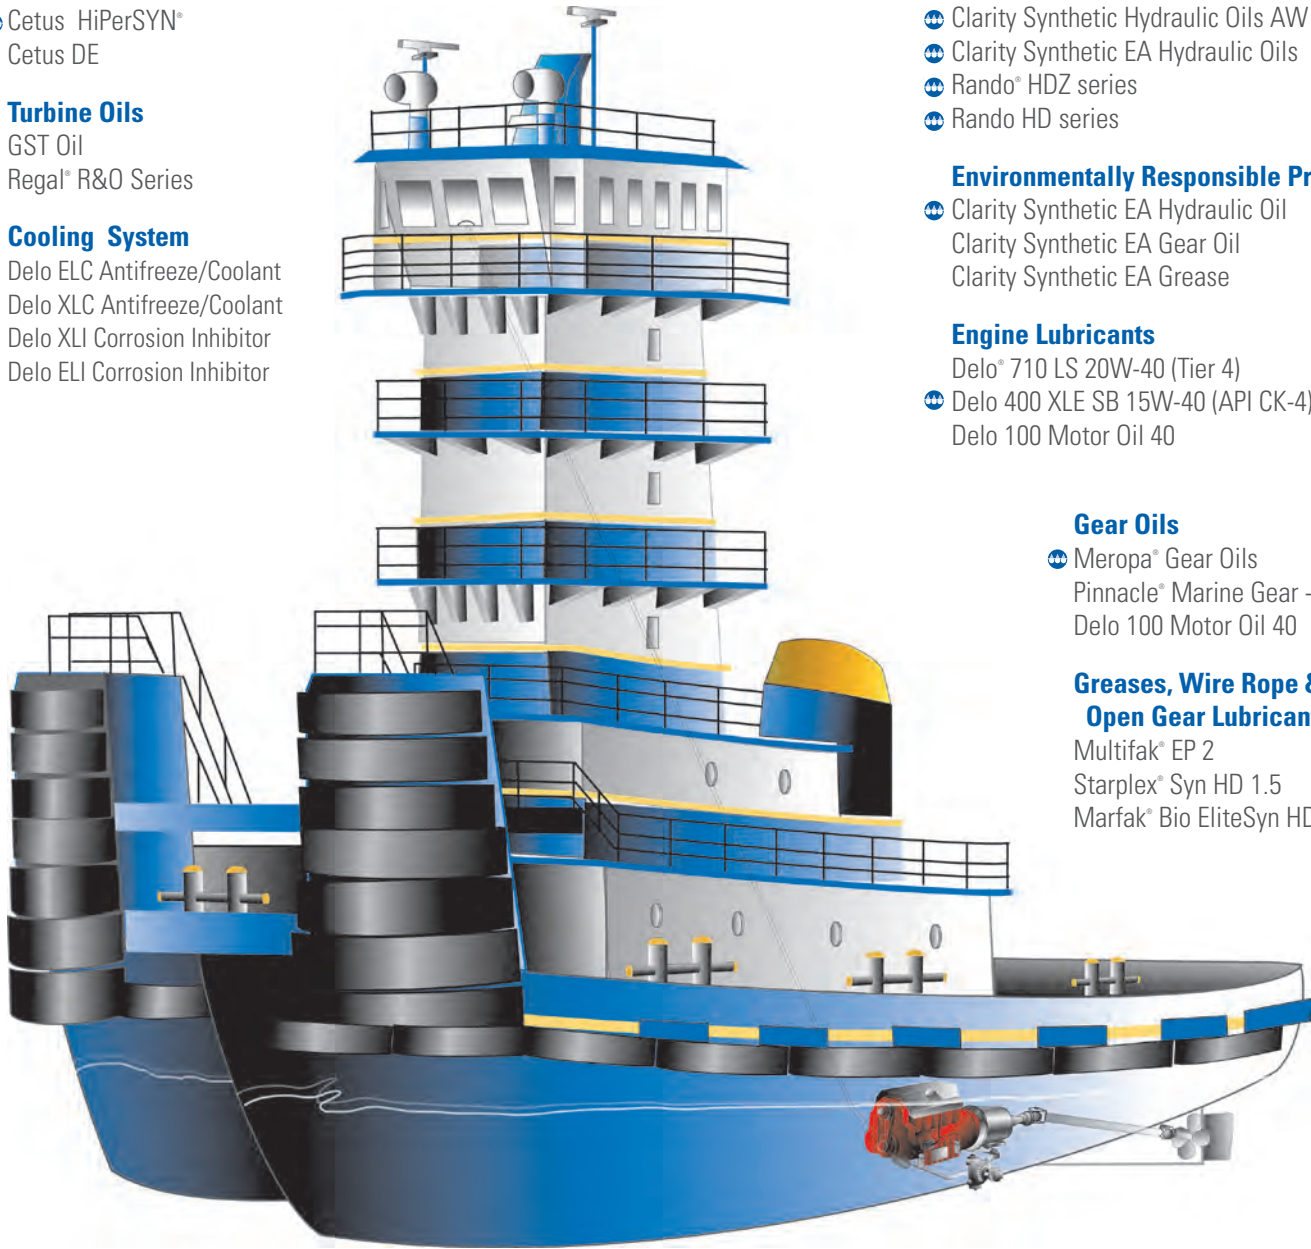

••• Available as ISOCLEAN® Certified

These product recommendations provide general guidelines. All manufacturers have different coolant and lubricant requirements and recommendations. It will be important to contact a Chevron representative or refer to the Original Equipment Manufacturer manual to confirm the proper product is used for the application. Visit chevron-gsc.force.com/lubeteksupport for confirmation of specific OEM specifications.



Chevron
Delo®

A Chevron company product

©2023 Chevron. All rights reserved. All trademarks are property of Chevron Intellectual Property LLC or their respective owners.