



# HOW TO TAKE AN OIL SAMPLE

Several different sampling methods exist to gather in-service oil, but they are not all the same. Collecting from the wrong place or long after the equipment stopped operations will alter the test results. This could mask damage occurring inside equipment or lead to recommendations for unnecessary maintenance.

## Recommendations for All Sampling

Regardless of method, every oil sample should follow these techniques.

Use the following tips to capture the best sample possible.

- » Never re-use disposable tubing
- » Purge stagnant oil from installed devices and tubing before collecting samples
- » Make sure the sample bottle is clean and free of contaminants
- » Fill out all equipment and fluid information in the HORIZON web or mobile app to eliminate:
  - ◇ Oil spills on paperwork
  - ◇ Handwriting errors
  - ◇ Duplicate equipment
  - ◇ Holds due to missing information
  - ◇ Sending paperwork with the sample
- » Send the sample to the lab immediately using a trackable mail service

## Choosing the Right Process

The best samples collect the oil circulating through the system during normal operations. System pressure and accessibility might require different equipment and methods to collect samples, so each maintenance program needs to make a decision on the process that is right for them.

## Installed Sampling Devices

These permanent devices collect the most representative samples possible in the least amount of time. The two common types differ based on if the system is pressurized or not.

## Sampling with a KP Pushbutton Valve



**BEST**  
REPRESENTATIVE SAMPLE



**FASTEST**  
SAMPLE SPEED

The KP Series is a push button sampling valve that is installed on a pressurized system. The valve should be installed on a pressurized line with a minimum of 4 psi and a maximum of 100 psi.

**STEP 1** – Have the equipment being sampled at or close to normal operating temperature with the equipment running. Remove the protective cap from the valve and wipe the opening with a clean, dry, lint-free cloth. Place a separate waste under the valve opening. Press the KP Series button and flush at least three times the fluid in the valve into the separate waste container. Dispose the waste oil properly.

**STEP 2** – Remove the lid from the sample bottle. Place the sample bottle under the valve opening. Press the KP Series button to dispense fluid into the sample bottle filling it to approximately  $\frac{3}{4}$  full.

**STEP 3** – Release the KP Series button to close the valve. Place the protective cap back onto the valve and secure it firmly. Screw the cap onto the sample bottle and tighten securely before wiping the outside of the sample bottle with the cloth.

**STEP 4** – Place one barcode label on the sample bottle and submit the sample information online in the HORIZON web or mobile app.



## HOW TO TAKE AN OIL SAMPLE

### Sampling with a KST Series Probing Valve



The KST Series Probe Sampling Valve is a needle valve that is installed on a pressurized (4 psi to 1,000 psi) or unpressurized systems. The KST Series Cap includes everything needed to retrieve samples from pressurized systems, which includes a bottle cap, 4" tube with a needle and a vent opening to allow flow. Unpressurized systems require a needle probe, tubing and a vacuum pump to draw fluid from the valve.

**STEP 1** – Have the equipment being sampled at or close to normal operating temperature with the equipment running or shut off (if using a vacuum pump). Wipe the valve with a clean, dry, lint-free cloth. Hold a separate waste container under the KST Series cap or vacuum pump and insert the needle probe into the valve. Flush (at least three times) the fluid in the valve into the container to purge stagnant oil and debris. Remove the needle probe to stop the flow and set the separate container in a safe place.

**STEP 2** – Remove the cap from the sample bottle. Place the KST Series cap or the vacuum pump onto the sample bottle and secure it firmly. Reinsert the needle probe to open the valve and work the pump if needed. Fill the sample bottle to approximately  $\frac{3}{4}$  full.

**STEP 3** – Remove the needle probe to stop the flow. Place the cap onto the sample bottle and tighten securely before wiping the outside of the sample bottle with the cloth.


**STEP 4** – Tighten the protective cap back onto the valve. Wipe the valve with a clean rag to remove any excess fluid. Discard the KST Series cap assembly in a safe manner. Check the vacuum pump for oil contamination.

**STEP 5** – Place one barcode label on sample bottle and submit the sample information online in HORIZON.

**STEP 6** – Drain remaining fluid out of tube into tank and remove tube from the oil. Wipe off the tube where it extended into the sample bottle. Remove the tube from the pump and properly dispose of it. Reusing tubing will contaminate future samples.

**STEP 7** – Place one barcode label on the sample bottle and submit the sample information online in the HORIZON web or mobile app.

### Sampling with a Vacuum Pump

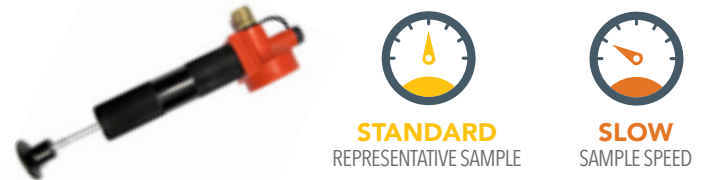

The vacuum pump and disposable tubing are used to extract samples from a dipstick or fill port of a shut-down or non-pressurized system.

**STEP 1** – Have the equipment being sampled at or close to normal operating temperature with the equipment shut off. Place clean, dry, lint-free cloth on a nearby surface and lay out sampling tools. Remove dipstick and place on the cloth. Lay the tubing along the length of dipstick and make a mark where the tube meets the top of the stick. Measure 12 inches (30 cm) above the mark and cut the tube.

If using a sample port without a dipstick, measure the outside of the reservoir tank, measure from the top of the port to halfway down the tank, place a mark at that length from the end of the tube, and cut the tube 12 inches above the mark.

**STEP 2** – Ensure the vacuum pump is clean (especially around the mounting area / face for the bottle). Insert the tube through the head of the vacuum pump and tighten lock ring. The tube should extend about one inch (3 cm) beyond the base of the vacuum pump head. Screw in the sample bottle to the bottom of the vacuum pump and tighten securely.

**STEP 3** – Place tube into the reservoir. To avoid drawing settled debris into the sample, only insert the tubing until the mark from Step 1 is flush with the top. Do not allow the tubing to contact the bottom of the sump.

**STEP 4** – Push and pull the vacuum pump plunger a few times to start the suction. Continue pumping until sample bottle is  $\frac{3}{4}$  full. Hold the pump upright and do not overfill the bottle to avoid contaminating the vacuum pump.

**STEP 5** – Unscrew the sample bottle from the vacuum pump to break the suction and continue to hold the pump upright. Seal the bottle with the lid and tighten securely before wiping the outside of the sample bottle with the cloth.

**STEP 6** – Drain remaining fluid out of tube into tank and remove tube from the oil. Wipe off the tube where it extended into the sample bottle. Remove the tube from the pump and properly dispose of it. Reusing tubing will contaminate future samples.

**STEP 7** – Place one barcode label on the sample bottle and submit the sample information online in the HORIZON web or mobile app.



# HOW TO TAKE AN OIL SAMPLE

## Sampling from a Drain



A drain “catch” requires no equipment beyond a sample bottle, but it produces a sample that is least representative of the fluid circulating in the machine.

**STEP 1** – Have the equipment being sampled at or close to normal operating temperature with the equipment shut off. Open the drain and allow approximately  $\frac{1}{3}$  of the fluid to drain.

**STEP 2** – Quickly move an open sample bottle into the oil stream. Fill  $\frac{3}{4}$  of the bottle before removing it from the stream.

**STEP 3** – Screw the cap onto the sample bottle and tighten securely. Wipe the outside of the sample bottle thoroughly with a clean cloth. This allows the sample label to adhere to the bottle securely.

**STEP 4** – Place one barcode label on the sample bottle securely and submit the sample information online in the HORIZON web or mobile app.

*No paperwork should be sent in for samples whose information was submitted online.*

## Shipping

Here are a few shipping tips based on which service you choose:

- » UPS, FedEx and DHL: If you sent your package via one of these services, check to see the status using the carrier website. These carriers deliver packages to our laboratory doors several times a day and we sign for all packages received.
- » United States Postal Service (USPS): This service does not track deliveries to our door. Their tracking service will show when the package was delivered to the post office, but it may take significantly longer to process our packaged mail for pickup.

[chevronlubricants.com/lubewatch](https://chevronlubricants.com/lubewatch)

A Chevron company product